



A

B

C

D

E

F

A


B

C

D

E

F

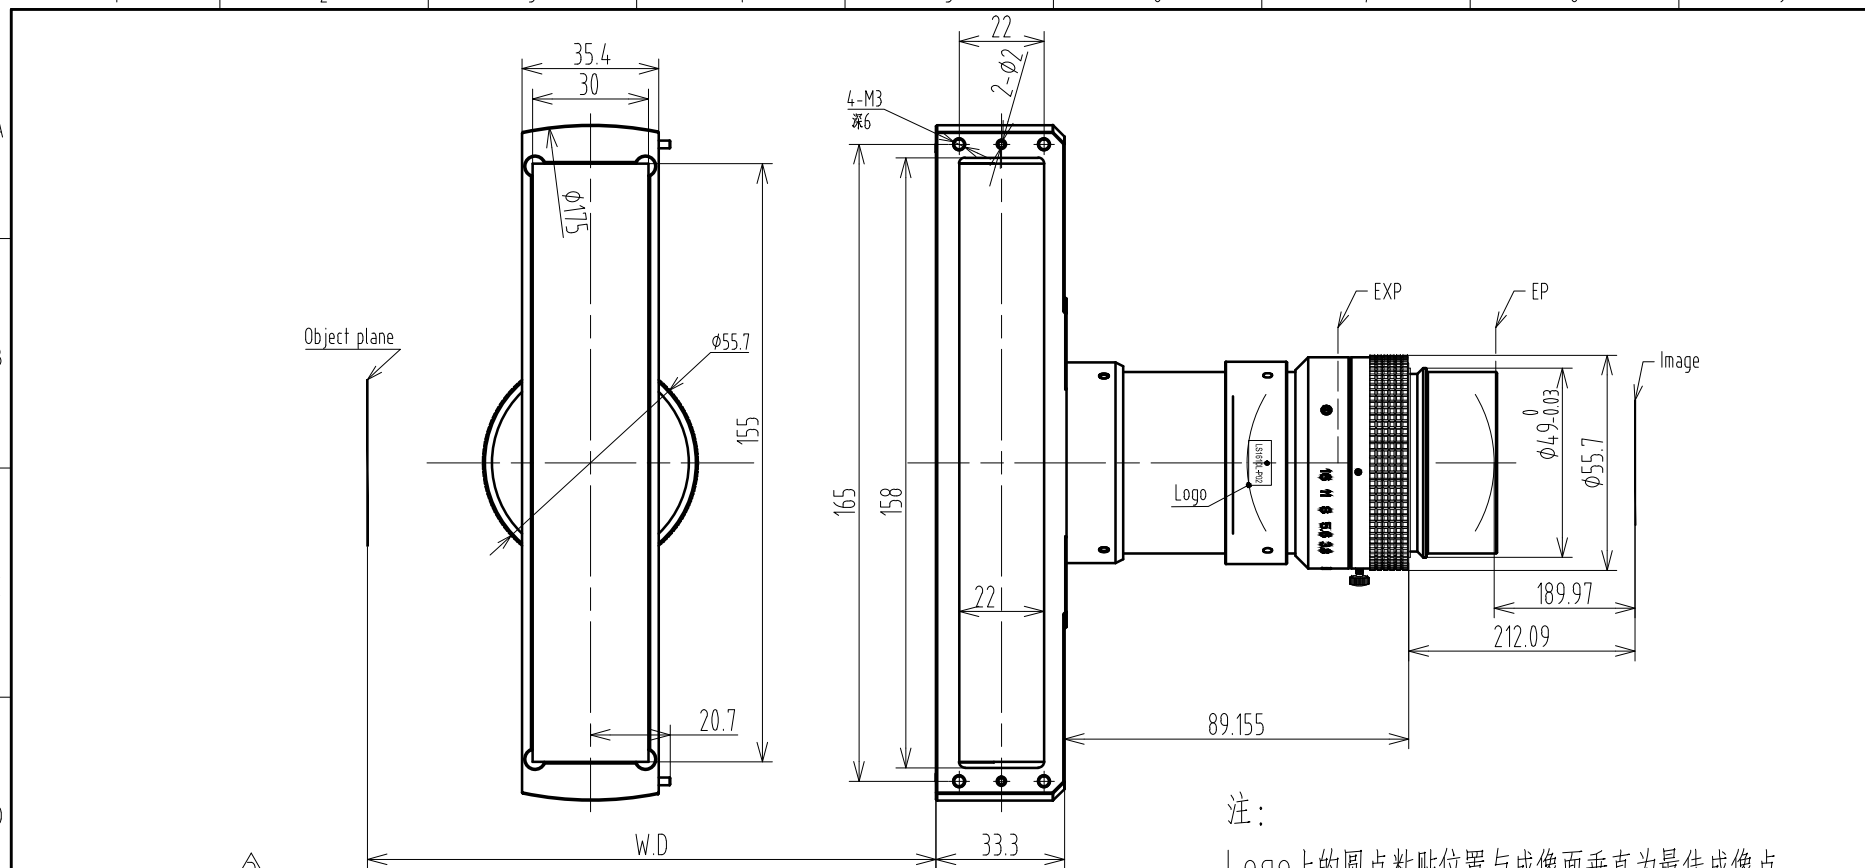


注:

Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

Main Specification				Image space NA		0.06				
Magnification	0.9X	1X	12X	Object space NA		0.06				
Working Distance	123.9±5	115±5	95.6±5	Entrance pupil diameter		27				
Conjugate Distance	442.84±9	449.53±9	453.4±9	Entrance pupil position		64.4				
Flange Focal Distance	196.52±0.5	212.09±0.5	235.33±0.5	Exit pupil diameter		27.7				
Max image	ø82			Exit pupil position		-230.1				
F/#	3.8						TOLERANCE LINEARITY TO ANGULAR TO DRAFT ANGL			
EFL	116									
Distortion	0.0005%									
Structure	8G									
							设计			
							校 对			
IMAGE QUALITY					3		刘勇	2022,07,12	审 核	
AXIS	ø46.2		ø82	标记	处数	更改文件号	担当	变更日期	批 准	
200lp/mm	160lp/mm		125lp/mm							

8	±0.55	±0.37
5.6	±0.3	±0.2
3.8	±0.2	±0.12
FNO	5u	3.5u
	Pixel	
Depth of field		



材料(环保)

单位

比例

mm

1:1

名称

规格图

页码

1/1

代号

LS1610L-P02 SPEC

版本

V03

1

2

3

4

5

6

7

8

9

A4

CHIOPT