


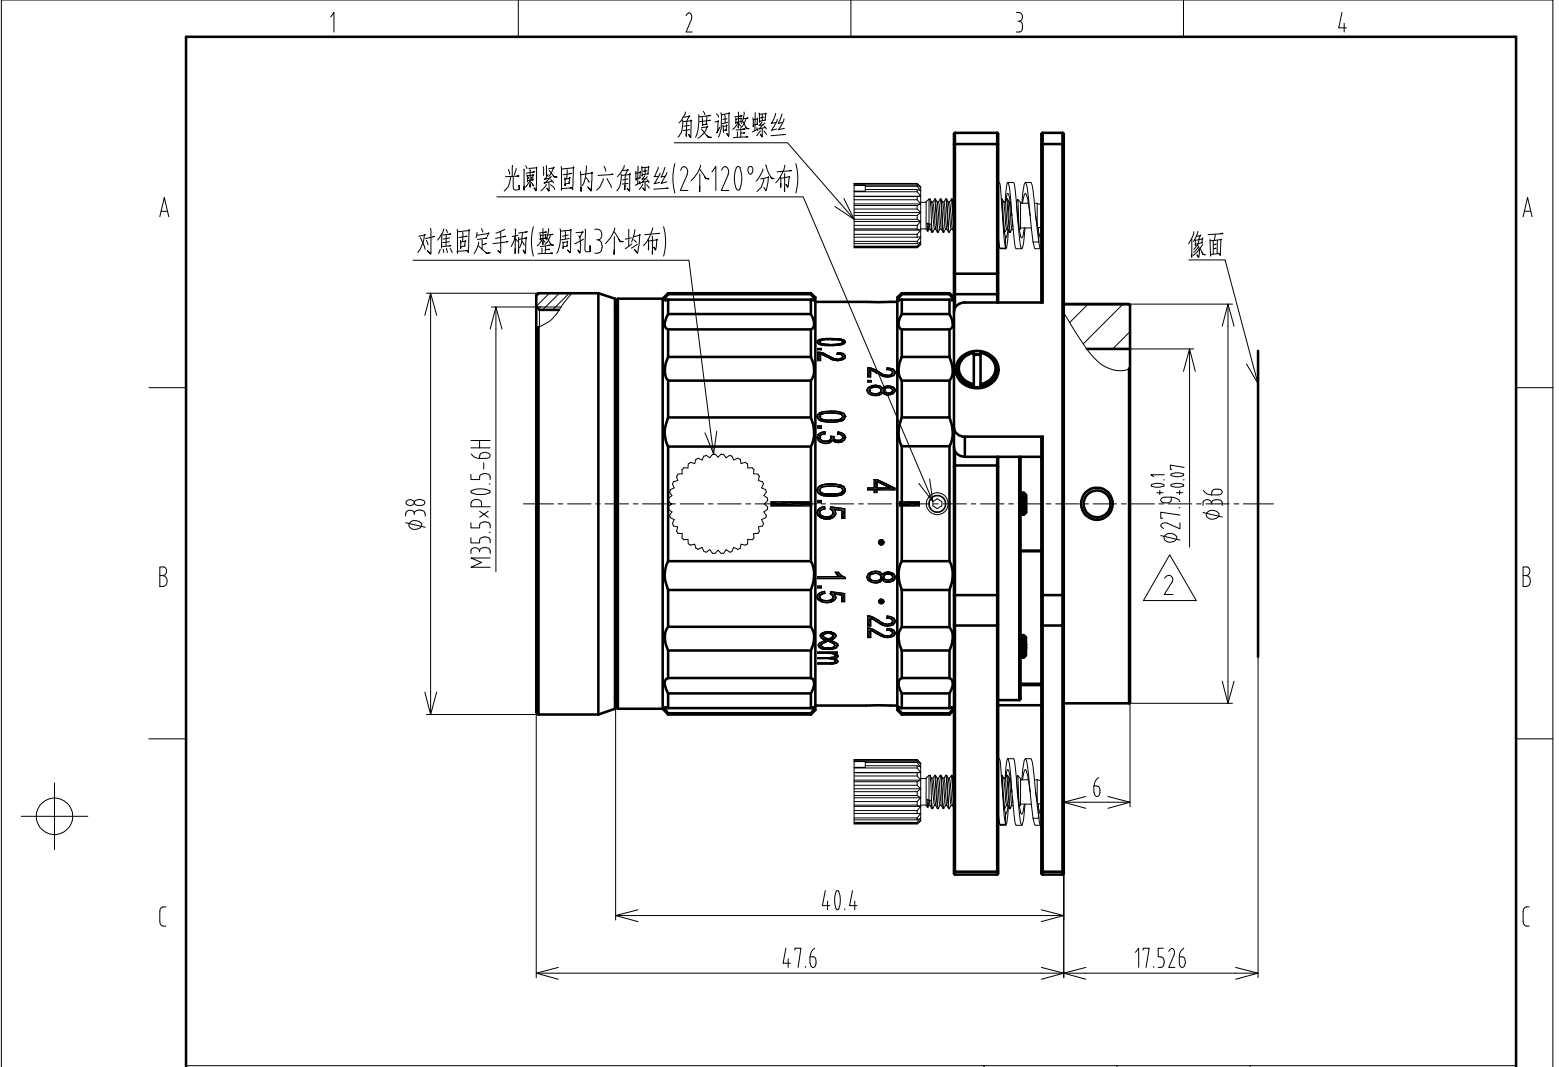

D	1.1" F2.8/35					Working distance	Optical Magnification	1.1" Field of View(mm)		D				
	Focal Length		f=35mm			mm		H	V					
	Max Diameter (Ratio)		F=1:2.8~22											
	Picture Size		1.1"(14.1×10.6mm) 1"(12.8×9.6mm) 2/3"(8.8×6.6mm)											
	Angle	H	22.6°	20.6°	14.3°	5000	0.0069X	2029	1528.2					
		V	17°	15.45°	10.7°	2000	0.0174X	809.4	609.6					
		D	28.3°	25.75°	17.86°	1000	0.0349X	503	303.5					
	Object Dimension at 200mm	H	78.2mm	71mm	48.8mm	900	0.0388X	362.6	273					
		V	58.7mm	53.3mm	36.6mm	800	0.0437X	322	242.4					
		D	97.68mm	88.8mm	61mm	700	0.05X	281.4	211.8					
E	Distortion (TV)		<0.02%	<0.02%	<0.01%	600	0.0585X	240.8	181.2	E				
	Focus distance(min)		0.2m			550	0.0639X	220.5	165.9					
	Flange back		17.526mm in air			500	0.0703X	200.3	187.6					
	Back focus		22.9mm(min)			450	0.0783X	180	135.5					
	Filter screw size		M35.5×P0.5			400	0.0882X	199.5	120.2					
	Front/Rear Effective Dia		Front ϕ 23mm Rear ϕ 19.1mm			350	0.101X	174.5	140					
	Mount		SM			300	0.1181X	115.9	89.9					
	Temperature Range		-10~+50℃			250	0.1421X	99.4	74.7					
	Storage Temperature Range		-20~+60℃			200	0.1805X	78.2	58.7					
	F						TOLERANCE : LINEARITY TOLERANCES $\pm$ 0.05 ANGULAR TOLERANCES ARE $\pm$ 30' DRAFT ANGLES AREA $\pm$ 0.5°/SIDE		三角法		材料(环保)		单位	比例
											mm	1:5:1		
					设计		名称		FA3516SM 规格		页码			
					校对		部番		FA3516SM SPEC		1/1			
					审核		商品代号				版本			
					批准						V02			